

HEAR YOURSELF THINK



SOUND INSULATION AND THERMAL MANAGEMENT

Cellofoam materials for ceiling, floor and wall Insulation reduces heat loss to a minimum and at the same time, shields the passenger compartment against unwanted noises from the engine, wheels and other sources. The materials have excellent sound absorption capacity and reflection of heat radiation (in the case of surface-lamination with aluminium foil) reduces heat loss even further. Cellofoam insulation also offers high temperature resistance and passes stringent requirements for flame, smoke and toxicity.

CELLO® F800 FR & ALG

Is a white PES non-woven that fulfils the highest FST Specifications. There are options to have laminated with Adhesive and also an embossed foil of highest-grade aluminium with 0.1mm thickness.

KEY BENEFITS

- Excellent sound absorbing values
- High temperature resistance
- Fulfils high FST requirements
- High shape stability
- Aluminium foil fulfils highest hygiene requirements and also prevents penetration of liquids
- Thickness available from 10 to 80 mm.

CELLO® DRAIN

Combines a fireproof PES non woven with a flexible fibre matrix layer. The latter ensures that condensation can easily drain off in any direction, preventing liquids from accumulating in the absorption material, which results in no loss in acoustic performance.

KEY BENEFITS

- The drainage function reliably prevents condensation soaking the absorber material and the formation of stagnant moisture
- Excellent sound absorbing values
- Fulfils high FST requirements
- In vibration tests, the fibre composite showed no tendency to break up
- Optional aluminium foil for fulfilling highest hygiene requirements
- Thickness available from 20 to 60 mm.

Please see reverse side for product application areas.




Never Underestimate Materials Intelligence.



mason grogan
INDUSTRIAL

SPECIALIST MATERIALS FOR DESIGN ENGINEERS

PRODUCT APPLICATION AREAS

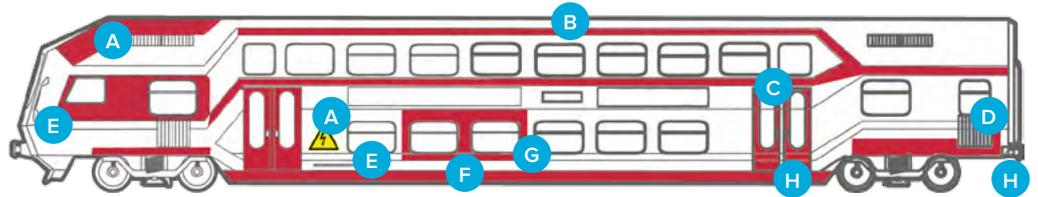


A PARTITION WALLS,
SWITCH CABINETS



HL FIRESTOP

Fire protection film with sound attenuation function


B AIR-CONDITIONING /
VENTILATION, AIR DUCTS



F800 FR HO ALG-01

Water-repellent PES non-woven + alu


C DOORS



EVA


Heavy Foil

D THERMAL INSULATION




HR 290 VLC

Melamine + non-woven




F800 FR ALG

PES non-woven + alu




SBF ALG

Bitumen film + alu



D 2500


PE foam



HR 290 ALG

Melamine + alu


E DRIVERS CAB, PASSENGER
CABIN, ENGINE ROOM



HR 290 VLC

Melamine + non-woven

F WALL AND FLOOR COVERINGS
WHERE CONDENSATION NEEDS
TO BE DRAINED OFF



DRAIN

Water-repellent PES non-woven + alu + fiber matrix

G SIDE WALL INSULATION



F800 FR HO ALG-01


Water-repellent PES non-woven + alu

H UNDER-FLOOR
OUTSIDE-ISOLATION,
FREQUENCY-CONVERTER



D 2600

Close-celled PE foam




HR 290 ALG

Melamine + alu



F800 FR

PES non-woven



HR 290 VLC

Melamine + non-woven



F800 FR ALG

PES non-woven + alu



F800 FR ALG

PES non-woven + alu

FOR MORE INFORMATION ON OUR PRODUCTS, PLEASE CONTACT

108 – 110 Carnarvon Street, Silverwater, Australia NSW 2128

T +61 2 9748 3838 F +61 2 9748 2525

salesmg@grogangroup.com | grogangroup.com



mason grogan
INDUSTRIAL

SPECIALIST MATERIALS FOR DESIGN ENGINEERS