


PORON® ShockPad Foam (0.10mm & 0.15mm)

DATA SHEET

The trend toward thinner mobile devices drives the search for space-saving impact solutions. As a result of these compact designs, the display, the printed wiring board, and other electrical components are crowded into very thin spaces. While a variety of materials can fill tight gaps, none have exhibited the type of vital impact protection seen in PORON® ShockPad foams.

These results show PORON ShockPad material outperforms competitors by up to 7 times!

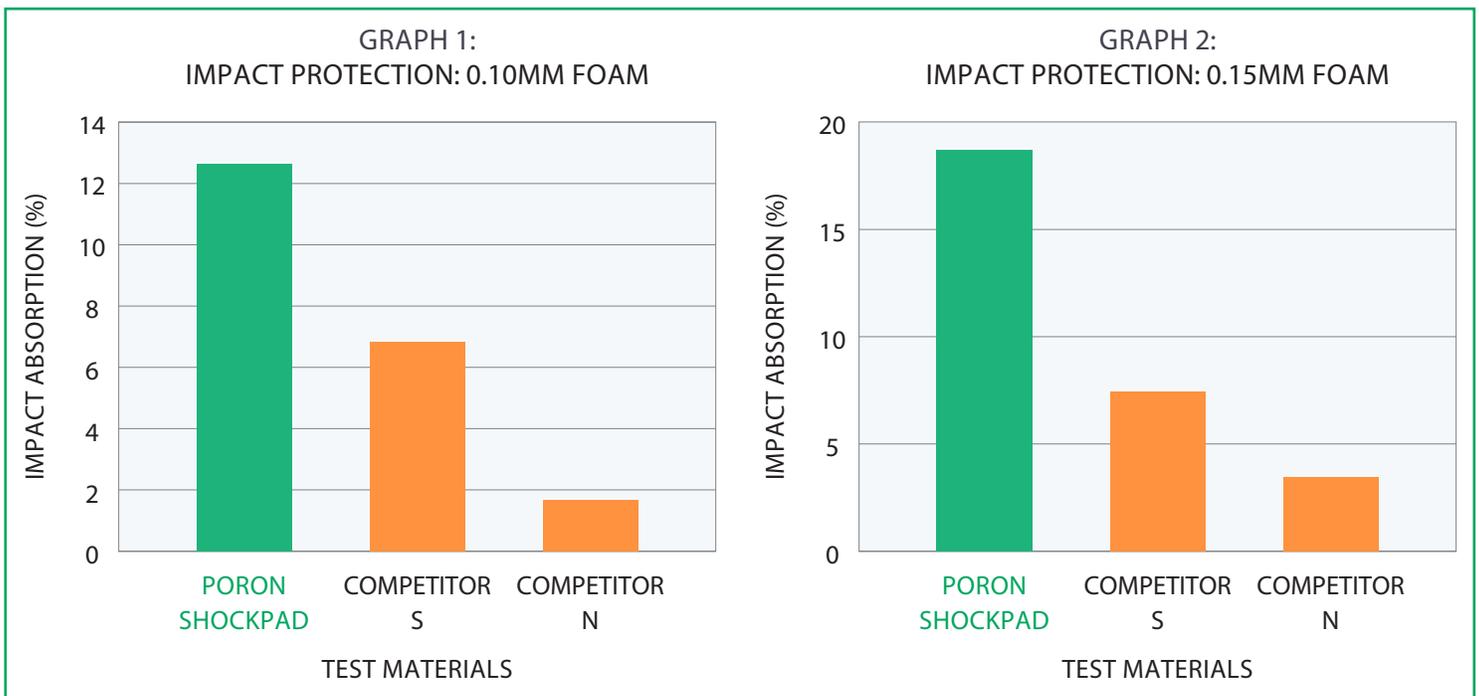

PORON ShockPad (0.10mm and 0.15mm) foam not only absorbs a significant amount of impact force, but displays excellent compression set resistance, is easy to process, and performs reliably over the life of the final product. To learn more, visit: Rogerscorp.com/ShockPad or contact your local sales representative.

The impact data above was compiled using the following test conditions:

Impacting Object: 4.3 g acrylic ball

Height of Drop: 30.5 cm

Procedure: The acrylic ball is dropped directly on the test material and the impact force is measured.

PORON® ShockPad Foam (0.10mm & 0.15mm)

DATA SHEET

PROPERTY	TEST METHOD	FINAL PRODUCT THICKNESS	
		0.10mm	0.15mm
URETHANE ONLY			
THICKNESS, mm (mil)	PTP-0023	0.10 (4)	0.15 (6)
Tolerance, mm (mil)		±0.025 (1)	±0.025 (1)
COMPRESSION FORCE DEFLECTION, kPa (psi)	Modified ASTM D 3574: PTP-0033 at 25% deflection	217 (31.5)	141 (20.5)
COMPRESSION SET, Typical %	ASTM D 3574 Test D, 70°C	4.3	3
STANDARD COLOR (CODE)		Black (04)	Black (04)
RELEASE PET*		0.10mm & 0.15mm Products	
THICKNESS, mm (mil)	Range	0.051 (2.01) – 0.053 (2.09)	
BREAKING STRENGTH, Mpa	GB/T1040.3-2006: MD, TD	≥150, ≥170	
ELONGATION, %	GB/T1040.3-2006: MD, TD	≤200, ≤200	
HEAT SHRINK RATE, %	GB/T16958-2008: MD, TD	0.6~0.8, 0.9~1.1	

* The release PET is typically removed during converting or final assembly and is not included as part of the total thickness.

- All metric conversions are approximate.
- Additional technical information may be available.
- All PORON Test Procedures are available for view. Please contact your Rogers Sales Engineer.
- Typical values are a representation of an average value for the population of the property. For specification values contact Rogers Corporation.



† Not shown to scale

Mason Grogan Industrial | 1300 859 960 or +61 (02) 9748 3838 | salesmg@grogangroup.com | www.grogangroup.com

The information contained in this Data Sheet is intended to assist you in designing with Rogers' High Performance Foam Materials. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown on the Data Sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers' High Performance Foam Materials for each application. The Rogers logo, The world runs better with Rogers, and PORON are licensed trademarks of Rogers Corporation. © 2013 Rogers Corporation, All rights reserved. Printed in U.S.A., 1113-PDF. Publication #17-275

The world runs better with Rogers.®